

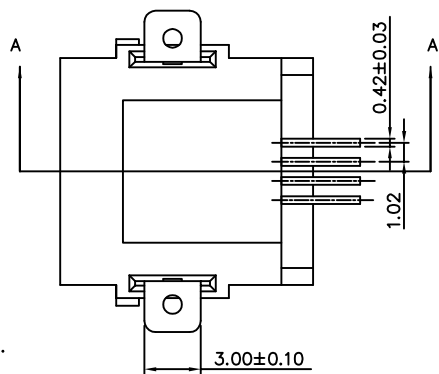
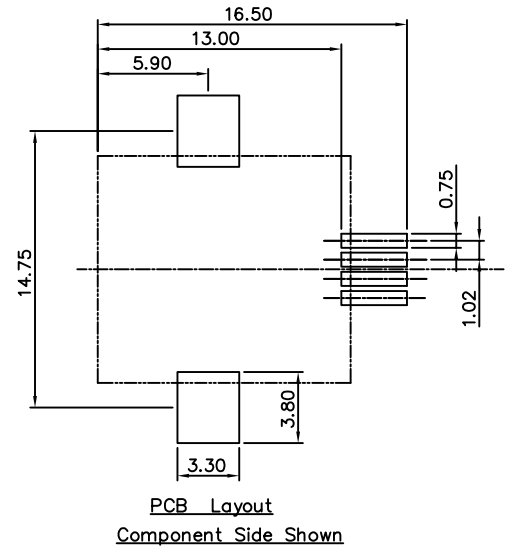
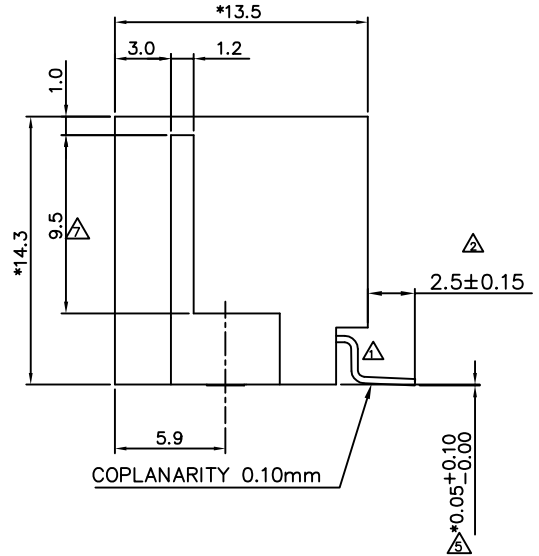


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

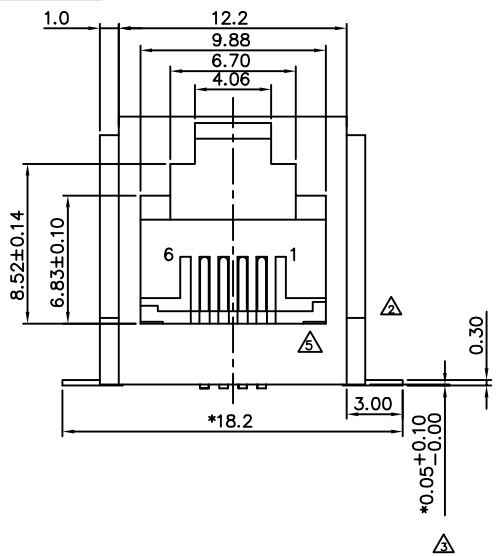

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : HIGH TEMP. UL94V-0. COLOR STANDARD BK.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- 3. PLATING : GOLD PLATING OVER NICKEL. WITH SEALING
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE TEMPERATURE : -40°C TO +85°C.
- 2. OPERATION TEMPERATURE : -20°C TO 70°C.
- 3. IR SOLDERING TEMPERATURE : 255°C~265°C (3~5 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TOTIA-1096-A.
PART NUMBER : N331X-022-0X

- 1=3u" 2=6u" 3=15u" 1-6P6C
- 4=30u" 5=50u" 2-6P4C(Tray)
- 7=GOLD FLASH 3-6P2C HIGH TEMP. BK
- 4-6P4C(Tape reel)

△ X2	新增料號和修改圖面與實物一致	Joy	061622'
△ X1	ADD NEW P/N.	DORIS	102016'
△ X1	MODIFY DRAWING	DORIS	040213'
△ X1	MODIFY NOTE	YANG	012210
△ X2	UPDATE DRAWING	SAIL	020108
△ X2	UPDATE DRAWING	SAIL	111307
△ X1	UPDATE DRAWING	LINGER	091707
△ X0	00000000 NEW DESIGN	LINGER	082707
MARK	ECN-NO.	REVISION RECORD	DRAWN DATE

 Contact Technology Co., Ltd. Material/Plated/Notes SEE NOTE	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE 2/1	CHECKED
	Dimension Range	Tolerance	UNIT	APPROVED
	X.X	±0.20	mm	
	X.XX	±0.15		
X.XXX	±0.10	SIZE	A3	SHEET 1/1
ANGLE	±5°			
NAME		MINI L/P SIDE ENTRY 6P SMT		
Tooling No.	PART NO. SEE NOTE	REV. 7		
	DOC. NO. NN330A022			