








RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

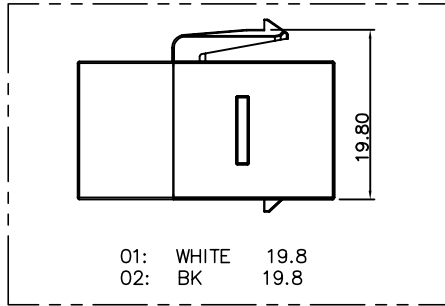

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz,1MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MECHANICAL:

- 1.HOUSING MATERIAL:PLASTIC UL94V-0
- 2.INSERT MATERIAL:PLASTIC UL94V-0
- 3.PCB MATERIAL:FR-4
- 4.PART NUMBER: N446X-039-0X

1-3u"	2-6u"	01: C3	WHITE	19.8
		02: C3	BK	19.8
3-15u"	4-30u"	03: C3	WHITE	19.6
		04: C3	BK	19.6
5-50u"				

△X0	0069000	NEW DESIGN	LONNY	010923'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
CTK	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1:1	APPROVED
	X.X	±0.20	UNIT	
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET 1/1
Contact Technology Co., Ltd.		ANGLE	±5°	
Material/Plated/Notes		NAME		
SEE NOTE		CAT.3 COUPLER W/ LATCH		
Tooling No.	PART NO.		REV.	
	SEE NOTE		0	
		DOC. NO.		
		NN446A039		