
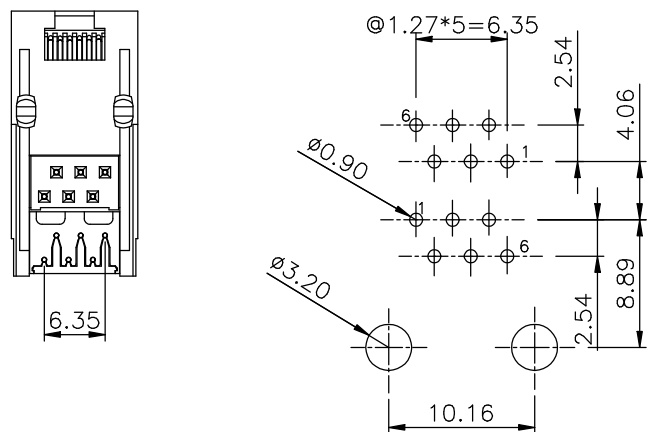


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

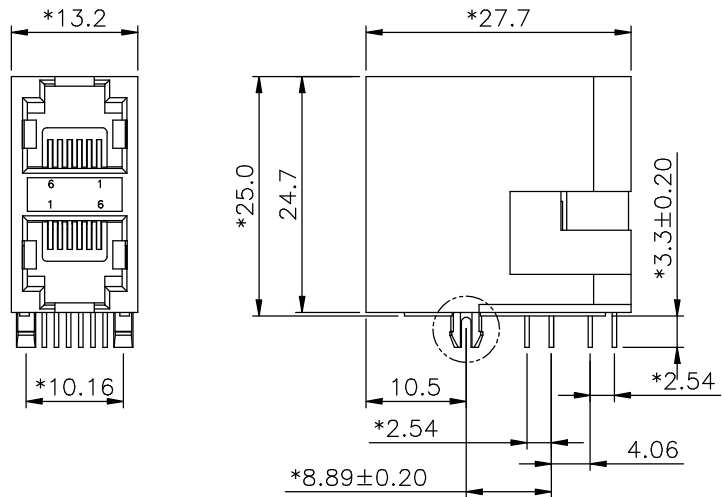

PC BOARD LAYOUT T=1.60MM
COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING & INSERT MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE, ϕ 0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO +70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
PART NUMBER: N39AX-164-0X

- | | |
|---------------------|------------|
| 1-3u" 2-6u" | 1-6P2C GY. |
| 3-15u" 4-30u" | 2-6P4C GY. |
| 5-50u" 7-GOLD FLASH | 3-6P2C BK. |
| | 4-6P4C BK. |

△ X0	0069000	NEW DESIGN	ROCK	110912	
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE	
 Contact Technology Co., Ltd.		UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE	CHECKED	
		Dimension Range	Tolerance	1/1	
		X.X	±0.20	UNIT	APPROVED
		X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET 1/1	
Material/Plated/Notes		ANGLE	±5°		
SEE NOTE		NAME	RJ11 2X1 STACKED PCB JACK UTP		
Tooling No.		PART NO.	SEE NOTE	REV. A	
		DOC. NO.	NN390A164		

Design drawing