


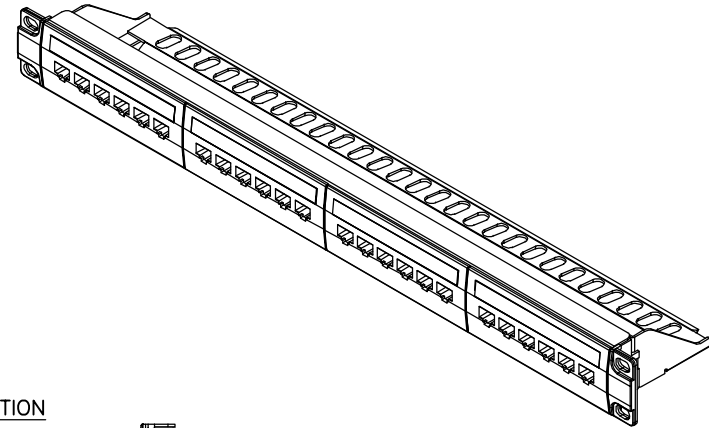
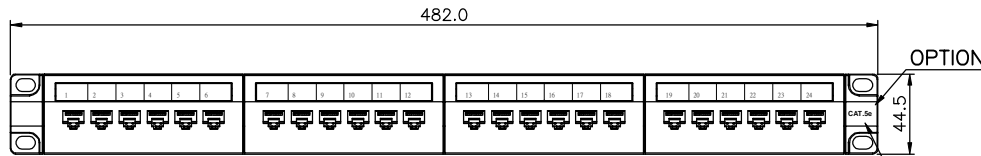


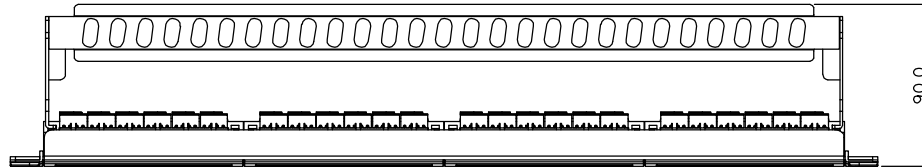

THIS IS A RoHS  
COMPLIANT  
COMPONENT/  
PRODUCT.



OPTION

**CAT.5e**  
**CAT.6**  
**CAT.6A**  
SCALE 5:1  
COLOR:WHITE

**NOTES:**

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : ABS UL94V-0
2. PANEL FRAME : CARBON STEEL, POWDER COATING IN BLACK COLOR
3. IDC MATERIAL : PC UL94V-0
4. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN t=0.35 mm  
Min.50 micro-inch Gold plating over 50-80 micro-inch Nickel plated
5. IDC CONTACT : PHOSPHOR BRONZE WITH NICKEL PLATING

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C
2. OPERATION : 0°C TO 70°C

CONFORMING TO TIA 568.2-D  
MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.  
PART NUMBER: N4225-235-0X

- 1.C6A
- 2.C6
- 3.C5e

000000		NEW DESIGN		HENRY		112019*	
MARK	ECN-NO.	REVISION RECORD		DRAWN		DATE	
 Contact Technology Co., Ltd. Material/Plated/Notes SEE NOTE		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED		
		Dimension Range	Tolerance	1/1	APPROVED		
		X.X	±0.20	UNIT	mm		
		X.XX	±0.15	SIZE	A3		
		X.XXX	±0.10	ANGLE	±5°	SHEET	1/1
		NAME		24 Ports UTP Patch panel			
Tooling No.		PART NO.		N4225-235-0X		REV.	
		DOC. NO.		NN422A235		0	