









RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

Suggested
Frame Size



"H" FIT FOR 19.20-19.40

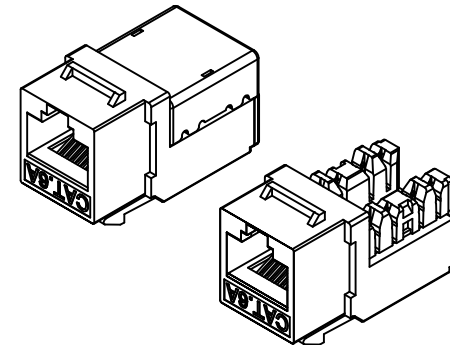

NOTES:

ELECTRICAL:


1. VOLTAGE RATING 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz,1MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- CONFORM TO TIA/EIA 568B
MATES WITH MODULAR PLUG CONFORMING TO
TIA-1096-A.

MECHANICAL:

- 1.HOUSING MATERIAL:PC UL94V-0
 - 2.INSERT MATERIAL: PBT+30% GF. UL94V-0
 - 3.PCB MATERIAL:FR-4
 - 4.CONTACT MATERIAL:PHOSPHOR BRONZE T=0.35mm
 - 5.IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.5mm
WITH SILVER OR NICKEL PLATING
 - 6.WIRE :# 23~26AWG
 - 7.PART NUMBER: N445X-168-0X
- 1-3u" 2-6u" 3-15u" 1-19.6MM WHITE
4-30u" 5-50u"



△X0	0069000	NEW DESIGN	LONNY	062023'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
 Contact Technology Co., Ltd.	<small>UNLESS OTHERWISE SPECIFIED TOLERANCE</small> <small>Dimension Range Tolerance</small>		<small>SCALE</small> 1:1	CHECKED
	X.X	±0.20	UNIT	APPROVED
	X.XX	±0.15	mm	
	X.XXX	±0.10	SIZE	
<small>Material/Plated/Notes</small> SEE NOTE		<small>ANGLE</small> ±5°	<small>SIZE</small> A3	<small>SHEET</small> 1/1
<small>NAME</small> CAT.6A UTP 90° KEYSTONE		<small>PART NO.</small> SEE NOTE	<small>REV.</small> A	
<small>Tooling No.</small>	<small>DOC. NO.</small> NN445A168		<small>Design drawing</small>	