
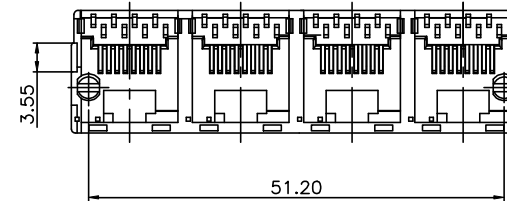



RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

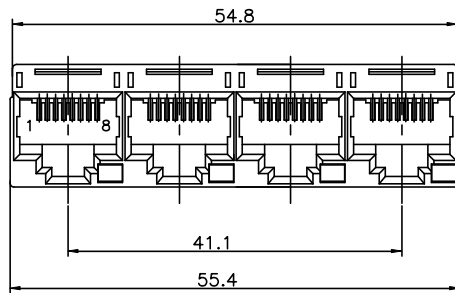

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
5. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
6. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : POLYESTER OR HIGH TEMP. UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. LED SIZE : 3.0*2.0*4.0, P=2.54mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER : N3J4X-169-0X

1-3u" 2-6u" 3-15u"
4-30u" 5-50u"

1- LED:GREEN POLYESTER YL.
2- LED:GREEN HIGH TEMP. YL.

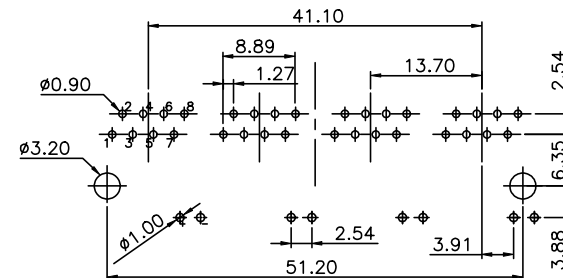

PC Board Layout
Component Side Shown

MARK	X0	0000000	NEW DESIGN	ROCK	072512'
ECN-NO.			REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
		Dimension Range	Tolerance	1/1	APPROVED
		X.X	±0.20	UNIT	
		X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET	1/1
Material/Plated/Notes		NAME			
SEE NOTE		1X4 TOP ENTRY LED JACK			
Tooling No.		PART NO. SEE NOTE		REV. 0	
		DOC. NO. NN3J0A169			