




PCB LAYOUT
 NOTES:
 1. UNSPECIFIED TOLERANCE: XX±0.05

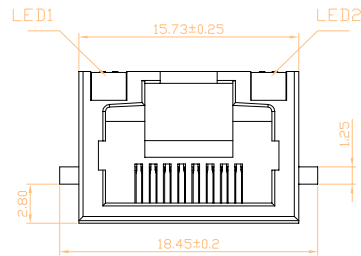

NOTES:

- 1.ELECTRICAL CHARACTERISTICS:
 - 1-1.CURRENT RATING:1.0A MAX.
 - 1-2.VOLTAGE RATING:150V MAX.
 - 1-3.CONTACT RESISTANCE: 40 MILLIOHMS MAX.
 - 1-4.INSULATION RESISTANCE:500M MIN.
 - 1-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC CONTACT TO CONTACT.
- 2.MECHANICAC CHARACTERISTICS
 - 2-1.MATING FORCES: 5 POUNDS MAX. WITH LATCH DEPRESSED.
 - 2-2.UNMATING FORCES: 10 POUNDS MAX. WITH LATCH DEPRESSED AT AN ADVANTAGEOUS ANGLE.
 - 2-3.OPERATING TEMPERATURE:-25° TO +80°
- 3.MATERIAL:
 - 3-1.HOUSING: HIGH TEMP UL 94V-0. STAND COLOR-BLACK.
 - 3-2.CONTACT:PHOSPHO-COPPER,THICKNESS 0.25MM. CONTACTS 6u"MIN ,GOLD PLATED ON CONTACT AREA, 100u"MIN ,TIN ON SOLDER TALL,WITH ENTIRE CONTACT UNDERPLATED 30~80u"MIN ,NI
 - PART NO:K3J1X-389-XX
 - 1-3u" 2-6u" 01-PA9T YL114C,LED1:GREEN,LED2:YELLOW
 - 3-15u"4-30u"5-50u"
 - 7-gold flash

△X0	000000	NEW DESIGN	ANDY	050420
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1/1	APPROVED
	X.X	±0.20	UNIT	
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET 1/1
		ANGLE	±5°	
Material/Plated/Notes		NAME		
SEE NOTE		RJ45 LED JACK UTP		
Tooling No.		PART NO.	SEE NOTE	REV. 0
		DOC. NO.	KK310A389	