


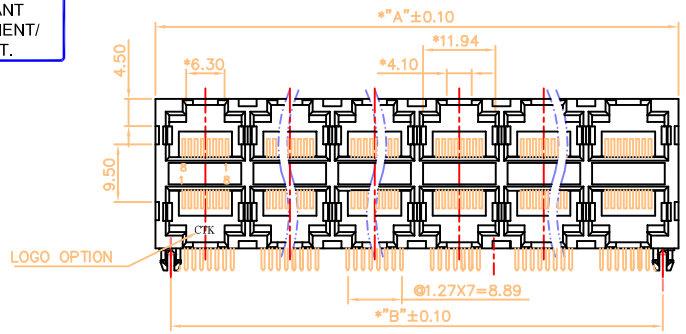


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

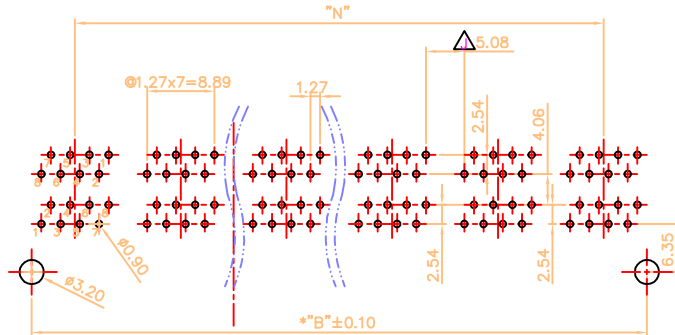

PORTS	"B" ±0.10	"A" ±0.10	"N" ±0.10
2X2	25.40	30.48	13.97
2X3	39.37	44.45	27.94
2X4	53.34	58.42	41.91
2X5	67.31	72.39	55.88
2X6	81.28	86.36	69.85
2X8	109.22	114.30	97.79

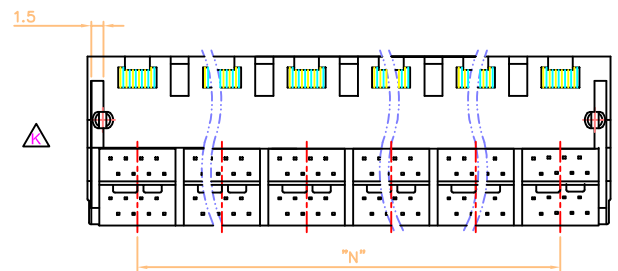

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz. 1MIN.

MECHANICAL:

- HOUSING & INSERT MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE, t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: - 0°C TO +70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F. PART NUMBER: N39XX-008-XX

- | | |
|--------|------------------------------|
| B-2X2 | 01-POLYESTER W/O LOGO 8C |
| C-2X3 | 02-HIGH TEMP. W/O LOGO 8C |
| D-2X4 | 03-HIGH TEMP. W/O LOGO 4C |
| E-2X5 | 04-POLYESTER W/CTK LOGO 8C |
| F-2X6 | 05-POLYESTER W/O LOGO 4C |
| H-2X8 | 06-HIGH TEMP. YL W/O LOGO 4C |
| 1-3u" | 07-FR52 BK W/O LOGO 8C |
| 2-6u" | 08-POLYESTER W/O LOGO 6C |
| 3-15u" | |
| 4-30u" | |
| 5-50u" | |

MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
△ X1		ADD NEW P/N.	DORIS	112416'
△ X1		UPDATE DRAWING	DORIS	080416'
△ X1		ADD ONE DIM.	QUAN	022613'
△ X1		ADD ONE DIM.	ROCK	090312'
△ X1		REMOVE NOTE FOR SHIELD	ROCK	011211'
△ X1		ADD NEW P/N	ROCK	090710'
△		UPDATE DRAWING	SAIL	041808
△		ADD NEW P/N(1)	LINGER	072607
△		ADD NEW P/N	LINGER	121306
△ X0	0066000	NEW DESIGN	LINGER	111006
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

	UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE	CHECKED
	Dimension Range Tolerance	1/1	
X.X	±0.20	UNIT	APPROVED
X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	
ANGLE	±5°	A3	SHEET 1/1
Contact Technology Co., Ltd. Material Plated/Notes		NAME 2XN STACK GANG JACK, STAMP PIN UTP	
SEE NOTE		PART NO.	REV.
		DOC. NO.	L
Tooling No.		SEE NOTE	
		NN390A008	