
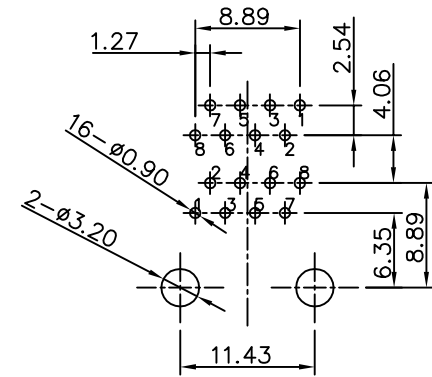
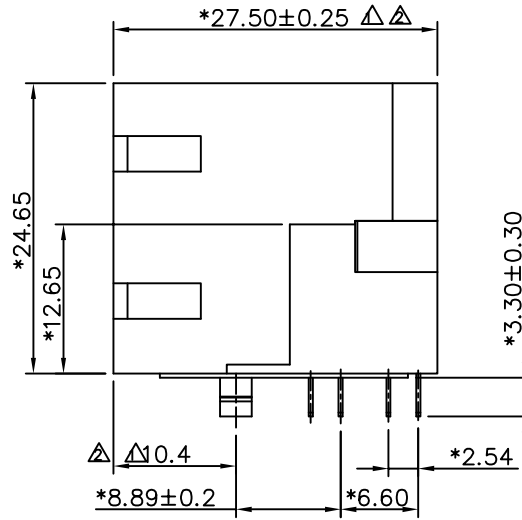


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

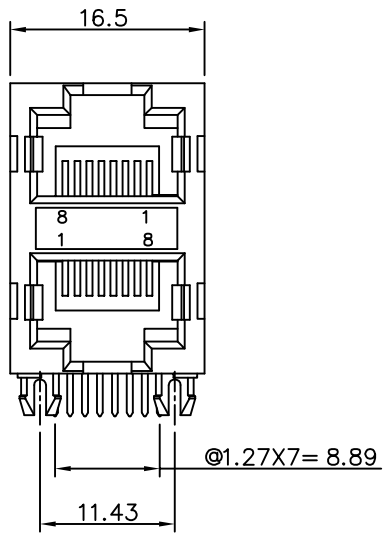

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
- INSERT MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE, t=0.35 mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: -0°C TO +70°C.

Δ MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

PART NUMBER: N39AX-037-XX

- 1-3u" 2-6u" 01-POLYESTER BK.
- 3-15u" 4-30u" 02-HIGH TEMP. BK.
- 5-50u"

Δ X2		MODIFY DRAWING	KARL	101514'
Δ X1		UPDATE DRAWING	DORIS	071814'
Δ X0	000000	NEW DESIGN	LINGER	040307
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE
		Dimension Range	Tolerance	1/1
		X.X	±0.20	UNIT
		X.XX	±0.15	mm
Contact Technology Co., Ltd.		X.XXX	±0.10	SIZE
Material/Plated/Notes		ANGLE	±5°	A3
SEE NOTE		2x1 STACKED GANG JACK STAMP PIN UTP		
Tooling No.	PART NO.		REV.	
	SEE NOTE		2	
		DOC. NO.		2
		NN390A037		