



RoHS


THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.



434.9

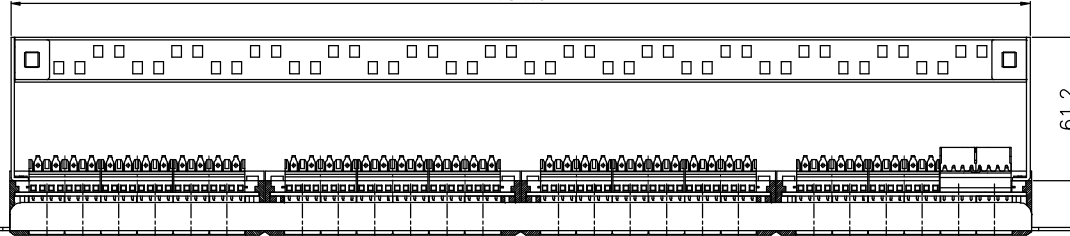


61.2



SCALE 2.5:1
COLOR: WHITE

482.0

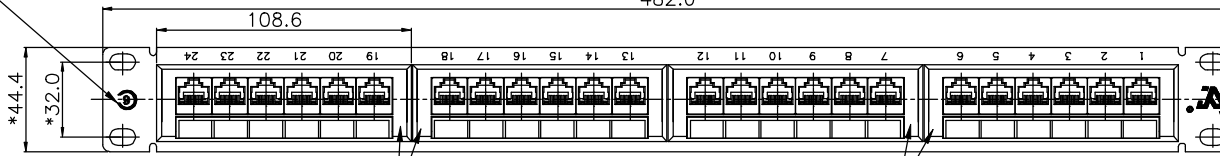


*44.4
*32.0

108.6

BLACK

BLACK



SCALE 2.5:1
COLOR: WHITE

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN.@ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+30%GF. UL94V-0
2. PANEL FRAME : CARBON STEEL, POWDER COATING IN BLACK COLOR
3. IDC MATERIAL : PC UL94V-0
4. CONTACT : PHOSPHOR BRONZE WITH NICKEL PLATING

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C
2. OPERATION : 0°C TO 70°C

CONFORMING TO TIA/EIA 568B
MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.
PART NUMBER: N422X-157-0X

- | | | |
|--------|--------|-------|
| 1-3U" | 4-30U" | 1-C5E |
| 2-6U" | 5-50U" | |
| 3-15U" | 2-C6 | |

△	006900	NEW DESIGN	HENRY	062116'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
CTK Contact Technology Co., Ltd.	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1/1	APPROVED
	X.X	±0.20	UNIT	
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET 1/1
ANGLE	±5°			
Material/Plated/Notes	NAME			
SEE NOTE	24 PORTS PATCH PANEL			
Tooling No.	PART NO.	N422X-157-0X		REV. 0
	DOC. NO.	NN422A157		