

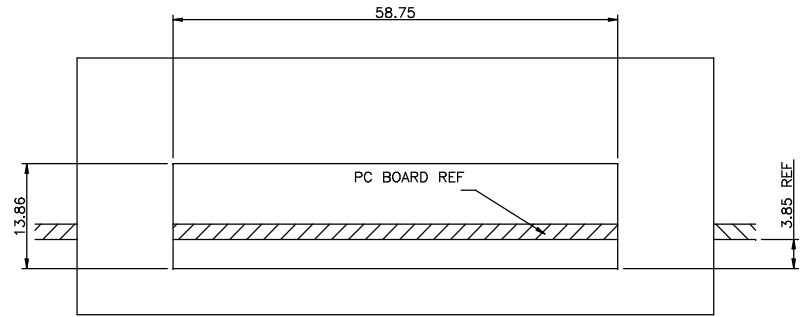

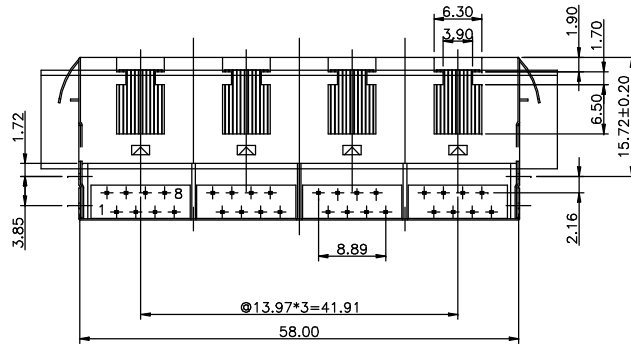
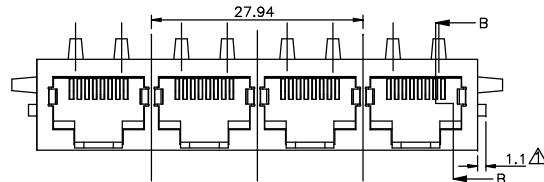


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

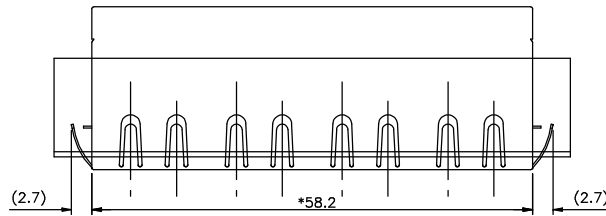

RECOMMENDED PANEL CUT OUT

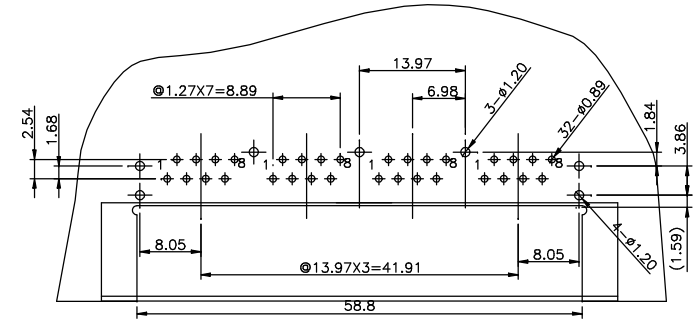

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. INSERT : 60 MILLIOHMS MAX.
4. INSULATING RESISTANCE : 1000 MEGOHMS @ 500 VDS MIN.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. SHIELD : BRASS C2680 H, t=0.20mm, 30u"~50u" NICKEL PLATING.
2. HOUSING : NHYT UL 94V-0.
3. INSERT : NHYT UL 94V-0.
4. PCB : FR-4, 0.5mm THICKNESS, DOUBLE SIDE
5. CONTACT : PHOSPHOR BRONZE t=0.35mm.

SELECTIVE GOLD PLATING OVER 50u" NICKEL.

6. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER : N3J4X-113-01

1- 3u" 2- 6u"
3- 15u" 4- 30u"
5- 50u"

△ X4		MODIFY DESIGN	PETER	031411'
△ X0	0069000	NEW DESIGN	ROCK	011911
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
 Contact Technology Co., Ltd. <small>Material/Plated/Notes</small>	UNLESS OTHERWISE SPECIFIED TOLERANCE		CHECKED	
	Dimension Range Tolerance		SCALE 1:1	
	X.X	±0.20 UNIT	APPROVED	
	X.XX	±0.15 mm		
X.XXX	±0.10 SIZE	A3	SHEET	1/1
ANGLE	±5°	NAME		
SEE NOTE		1X4 W/O LED SIDE ENTRY PCB JACK		
Tooling No.	PART NO.	SEE NOTE	REV.	
	DOC. NO.	NN3JOA113	1	