
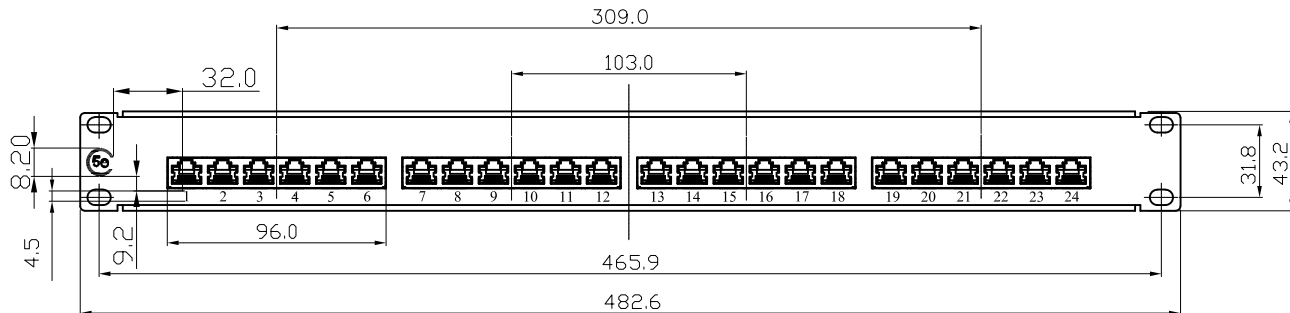
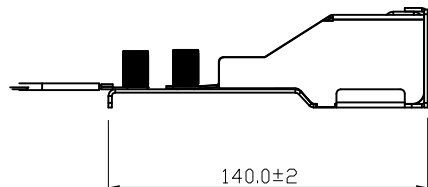
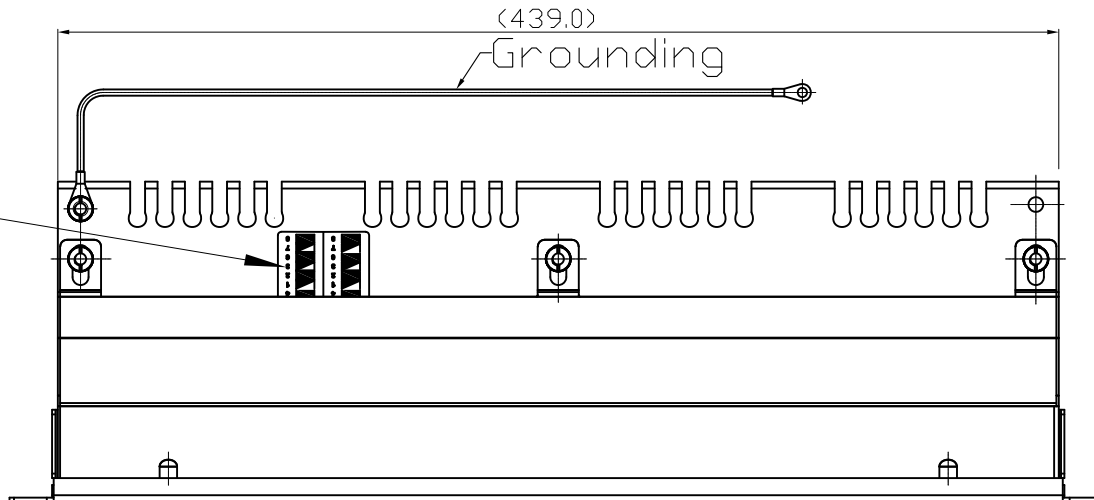


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

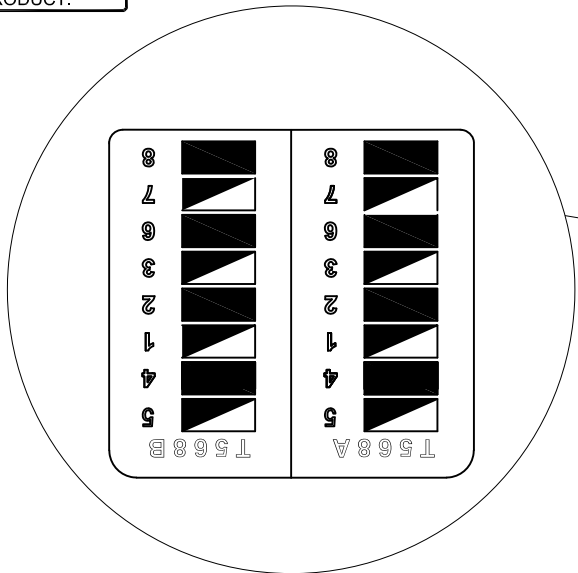

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING: 125 VAC RMS.
- 2. CURRENT RATING: 1.5 AMP.
- 3. CONTACT RESISTANCE: 100 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH: 750 VAC 60HZ, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL: PBT+30%GF UL94V-0.
- 2. PANEL FRAME: CARBON STEEL ,POWDER COATING IN BLACK COLOR
- 3.IDC MATERIAL :PC UL94V-0 CONTACT: PHOSPHOR BRONZE WITH NICKEL PLATING

PART NUMBER: N422X-093-0X

- 1.30U"
 - 2.60U"
 - 3.15U"
 - 4.30U"
 - 5.50U"
- 1- BLACK W/C5e&1-24

△ X0	000000	NEW DESIGN	JESSE	112322'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range Tolerance		1/1	
	X.X	±0.20	UNIT	APPROVED
	X.XX	±0.15	mm	
Contact Technology Co., Ltd.		X.XXX	±0.10	SIZE
Material/Plated/Notes		ANGLE	±1°	A3
SEE NOTE		NAME	C5e SHIELD PATCH PANEL 24 PORT	
Tooling No.		PART NO.	SEE NOTE	REV.
		DOC. NO.	NN422A093	0

Design drawing