
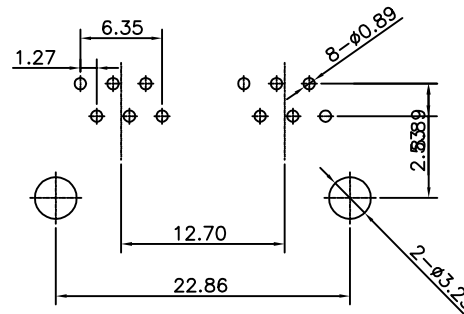
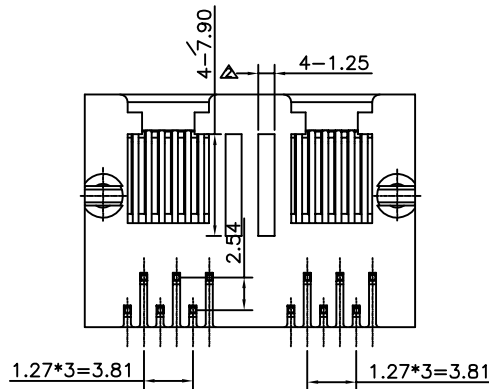



ROHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

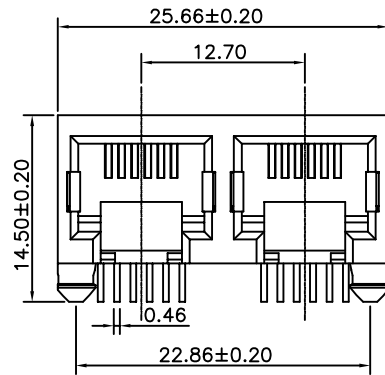

PC Board Layout  
Component Side Shown

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : POLYESTER OR HIGH TEMP UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm
3. PLATING : CONTACT AREA- SELECTIVE GOLD PLATING MIN OVER 50u" NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: K332X-028-XX

- 1-3u" 2-6u" 3-15u"
- 4-30u" 5-50u" 7-6/F

- 01:PBT GREEN 6P4C,
- 02:FR52 BLACK 6P2C.
- 03:PBT GREEN 6P6C.
- 04:PBT GREEN 6P2C.
- 05:PBT BLACK 6P2C.
- 06:PBT BLACK 6P4C.
- 07:PBT BLACK 6P6C.
- 08:FR52 COOL GRAY 3u 6P2C.
- 09:FR52 COOL GRAY 3u 6P4C.
- 10:PBT COOL GRAY 2C 6P4C.
- 11:PBT COOL GRAY 3U 6P2C.
- 12:PBT WHITE 6P6C.
- 13:PBT WHITE 6P2C.

△ X1		ADD TO P/N	Andy	100821
△ X1		ADD TO P/N	Joy	090321
△ X1		ADD TO P/N	SOULE	033020
△ X3		ADD TO P/N	JOY	011816
△ X0	000000	NEW DESIGN	JOY	052615

MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
------	---------	-----------------	-------	------

<b>CTK</b> Contact Technology Co., Ltd.	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	2.5/1	APPROVED
	X.X	±0.20	UNIT	
	X.XX	±0.10	mm	
	X.XXX	±0.05	SIZE	
ANGLE	±5°	A3	SHEET 1/1	

Material/Plated/Notes		NAME	
SEE NOTE		11.5 SIDE ENTRY 6P DUAL PORT	
Tooling No.	PART NO.	SEE NOTE	REV.
	DOC. NO.	KK330A028	E