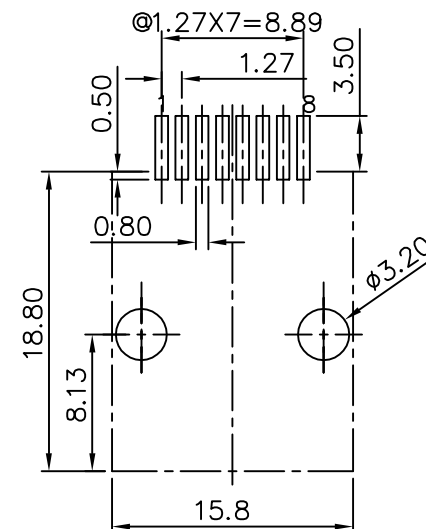
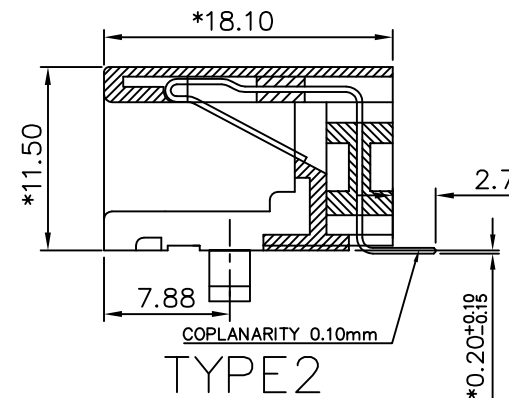
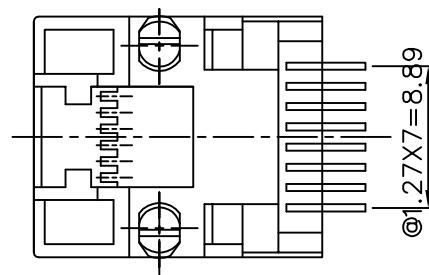
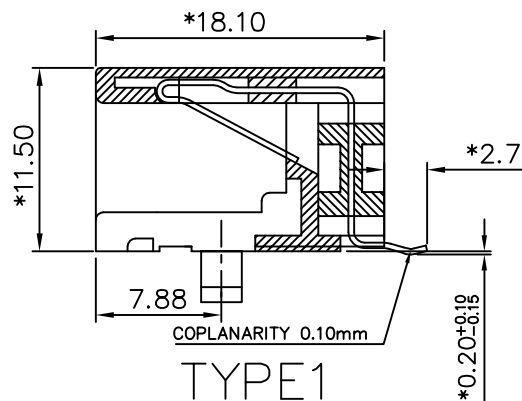
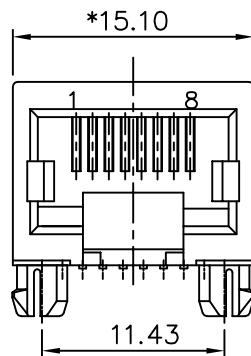


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

PC BOARD LAYOUT COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGHT TEMP UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: N331X-049-01

1-3u" 2-6u" 3-15u" 4-30u" 5-50u"

01-8P8C BK TYPE1
02-8P8C BK TYPE2

△ X1		新增平脚料号	SOULE	101619
△ X0	0066000	NEW DESIGN	YANG	101509
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
 Contact Technology Co., Ltd.		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE 2.5/1	CHECKED
		Dimension Range Tolerance		
		X.X ±0.20 UNIT mm		APPROVED
		X.XX ±0.15		
		X.XXX ±0.10	SIZE A3	
		ANGLE ±5°		
Material/Plated/Notes		NAME		
SEE NOTE		SIDE ENTRY 8P8C SMT JACK		
Tooling No.		PART NO.	SEE NOTE	REV.
		DOC. NO.	NN330A049	1

Design drawing