


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

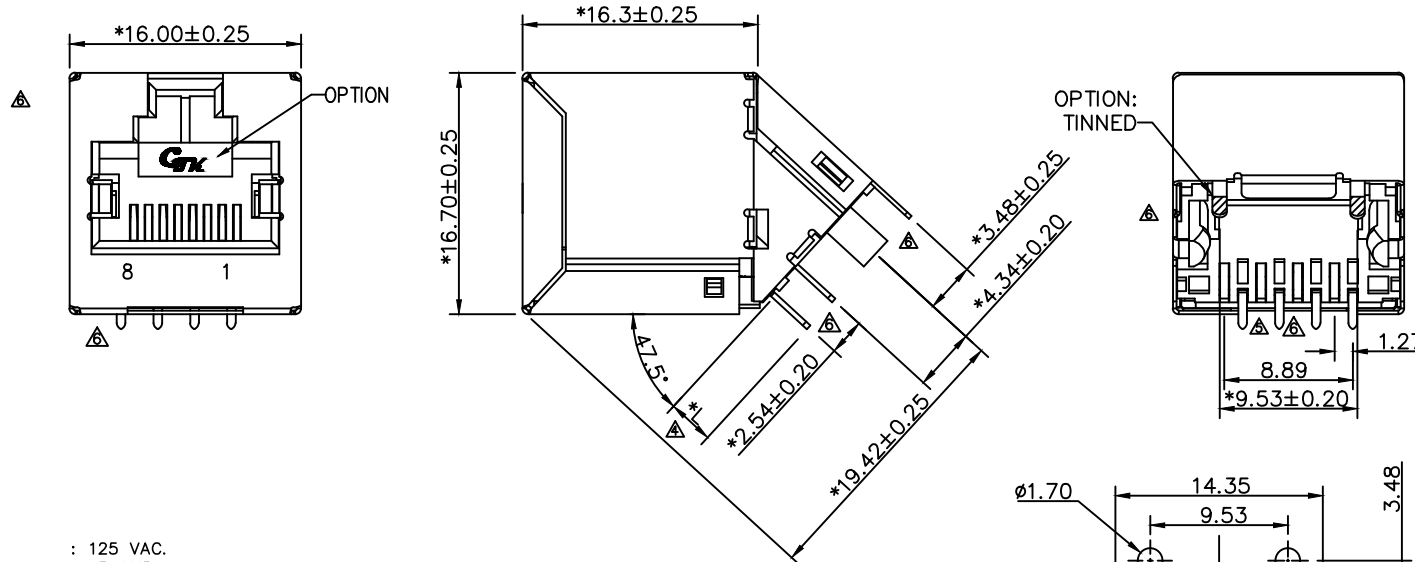

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS @ 500 VDC. MIN.
- 5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm.
- 3. SHIELD MATERIAL : COPPER ALLOY t=0.20 mm.
- 4. PLATING : SELECTIVE GOLD PLATING OVER NICKEL.
- 5. OPERATING LIFE : 750 CYCLES MIN.
- 6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 7. PCB RETENTION POST-SOLDER : 10 LBS MIN.


ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C
- 2. OPERATION : -40°C TO +85°C

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

PART NUMBER: N371X-026-XX

- 1-3u" 2-6u" 01-POLYESTER W/O LOGO W/TIN PLATING L1.
- 3-15u" 4-30u" Δ02-HIGH TEMP. W/O LOGO W/O TIN PLATING L1.
- 5-50u" 03-POLYESTER W/CTK LOGO W/ TIN PLATING L1.
- 04-HIGH TEMP. W/CTK LOGO W/ TIN PLATING L1.
- Δ05-POLYESTER W/O LOGO W/O TIN PLATING L1.
- ΔΔ06-(DISABLE) HIGH TEMP W/O LOGO W/O TIN PLATING L1.
- ΔΔ08-HIGH TEMP W/O LOGO W/O TIN PLATING L2.
- Δ09-PA9T HIGH TEMP W/WE LOGO W/O TIN PLATING L1

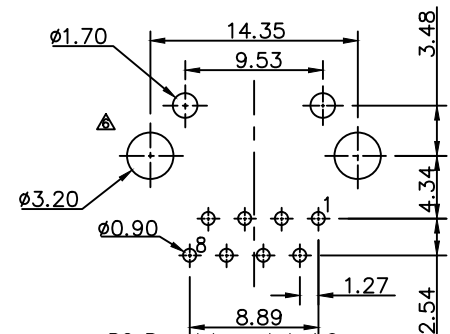

Component Side Show

MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
Δ X2		MODIFY DRAWING	TYLER	050619'
Δ X2		MODIFY DRAWING	HENRY	062317'
Δ X7		MODIFY DRAWING	DORIS	080616'
Δ X2		MODIFY DRAWING	DORIS	112815'
Δ X3		ADD NEW P/N	MAYER	071613'
Δ		ADD NEW P/N	QUAN	122512'
Δ X1		ADD NEW P/N	ETHAN	102912
Δ X1		ADD NEW P/N(3)	YANG	060809
Δ X0	000000	NEW DESIGN	YANG	040909

 Contact Technology Co., Ltd. Material/Plated/Notes SEE NOTE	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1.25/1	
	X.X	±0.20	UNIT	APPROVED
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET 1/1
ANGLE	±5°			
PART NO. SEE NOTE		REV. 8		
DOC. NO. NN370A026		Design drawing		

L	
1	3.19±0.20
2	1.5