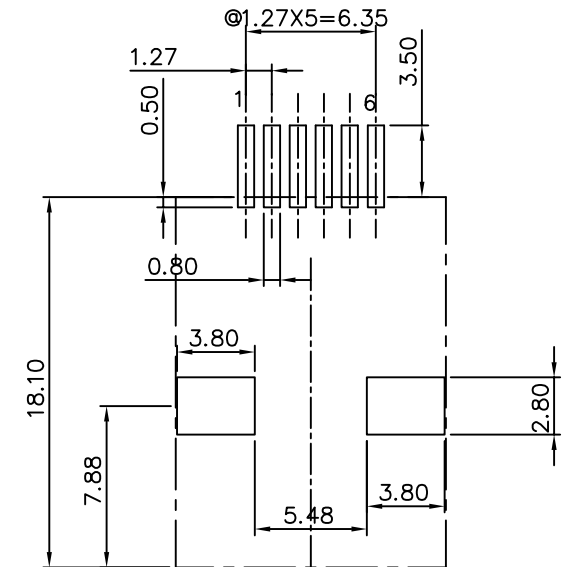
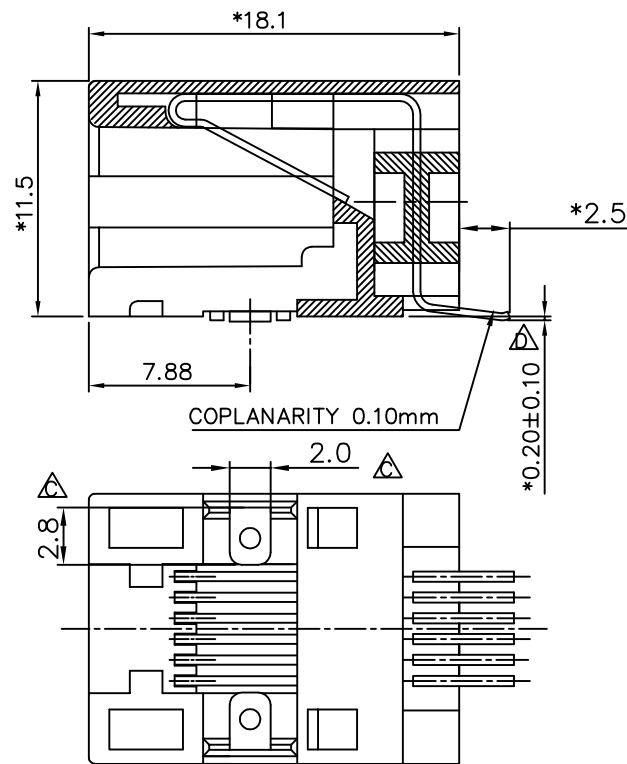
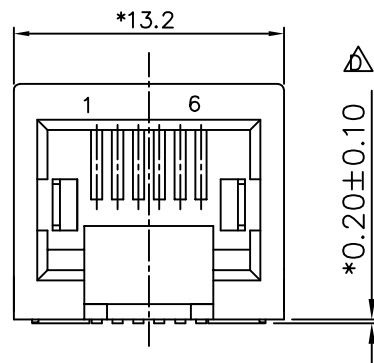


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:


- HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.
PART NUMBER: N331X-014-0X

1-3u" 2-6u" 1-6C
3-15u" 4-30u" 2-4C
5-50u" 3-2C

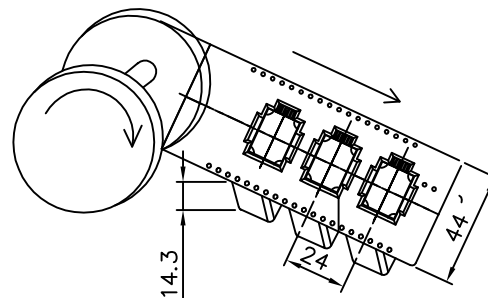

△ X2		MODIFY DRAWING	ROCK	061212'
△ X2		UPDATE DRAWING	DORIS	082311'
△ X1		ADD NEW P/N(3)	LINGER	061207
△ X0	0000000	NEW DESIGN	LINGER	020107
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

Contact Technology Co., Ltd. Material/Plated/Notes SEE NOTE	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE 3/1 mm	CHECKED	
	Dimension Range	Tolerance		APPROVED	
	X.X	±0.20		SHEET 1/1	
	X.XX	±0.15		DATE	
ANGLE		±0.10	SIZE A3	SIDE ENTRY PCB JACK(SMT) 6P PEG IN	
TOOLING No.		PART NO.	SEE NOTE	REV. D	
		DOC. NO.	NN330A014		

Design drawing