
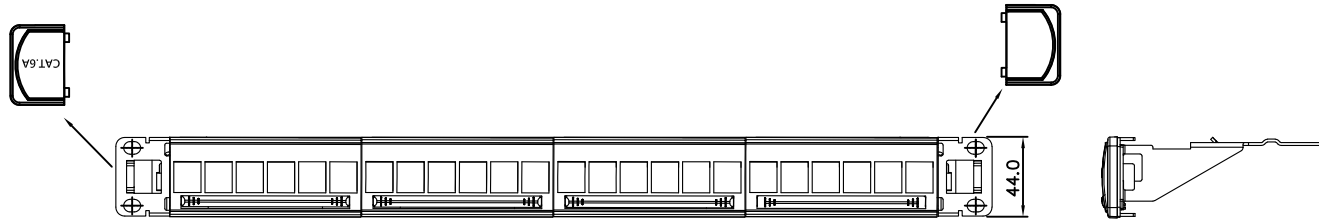
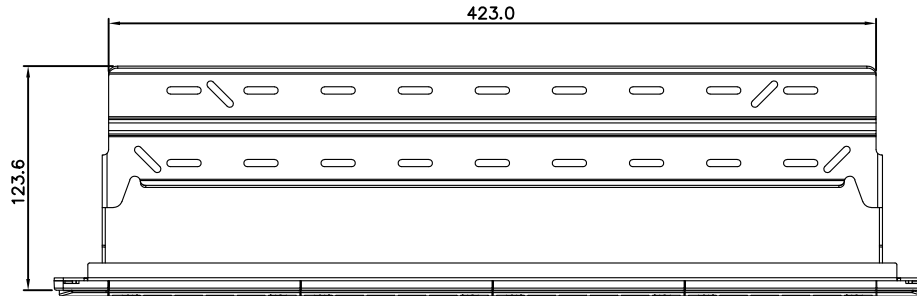


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

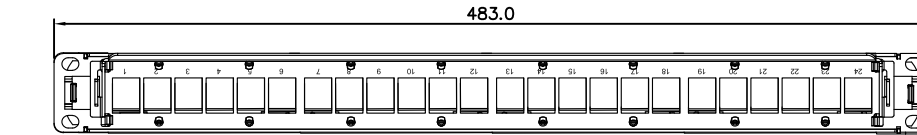

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC
- 2. CURRENT RATING : 1.5 AMP
- 3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC
- 5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.

MECHANICAL:

- 1. FRONT COVER MATERIAL : ABS 757 PANTONE 2767C
- 2. ABOUT COVER MATERIAL : ABS 757 PANTONE 2767C
- 3. IDC MATERIAL : PC UL94V-0
- 4. TRANSPARENCY MATERIAL : PC

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C
 - 2. OPERATION : 0°C TO 70°C
- CONFORMING TO TIA/EIA 568B
 MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A
 PART NUMBER: N422Y-181-01

△	0000000	NEW DESIGN	HENRY	052417'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
 Contact Technology Co., Ltd.	<small>UNLESS OTHERWISE SPECIFIED TOLERANCE</small> <small>Dimension Range Tolerance</small>		<small>SCALE</small> 1/1	CHECKED
	X.X	±0.20	UNIT	APPROVED
	X.XX	±0.15	mm	
	X.XXX	±0.10	SIZE	
ANGLE	±5°	A3		SHEET 1/1
Material/Plated/Notes		NAME		
SEE NOTE		24PORTS VACANT PATCH PANEL		
Tooling No.		PART NO. N422Y-181-0X	REV. 0	
		DOC. NO. NN422A181		