
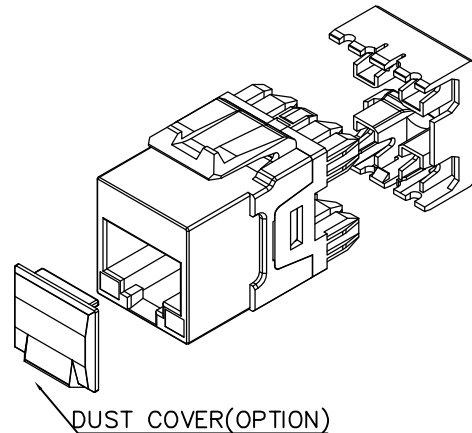








RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.



DUST COVER(OPTION)

WHITE

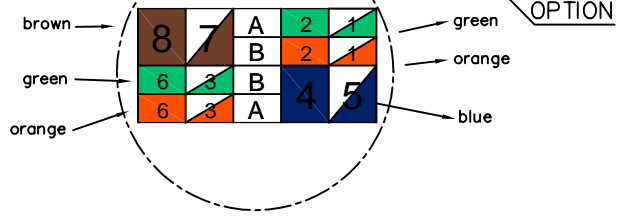

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1 MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : PC UL94V-0
- 2. INSERT MATERIAL : PC UL94V-0
- 3. COVER MATERIAL : PC UL94V-0
- 4. FCC COVER MATERIAL : PC UL94V-0
- 5. PCB MATERIAL : FR-4 THICKNESS 1.2 mm
- 6. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN t=0.35 mm
- 7. IDC CONTACT MATERIAL : Min.50 micro-inch Gold plating over 30-80 micro-inch Nickel plated
- 8. WIRE : PHOSPHOR BRONZE t=0.50 mm WITH NICKEL PLATING
- 9. Durability : #23~26 AWG

- 9-1. JACK :750 cycles Plug-Jack mating and unmating test,insertion cycles at 20 cycles/minute Max.
- 9-2. IDC : Max.200 punching times.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION : -40°C TO +85°C.

CONFORMING TO TIA/EIA 568B
 MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.
 PART NUMBER: N4425-099-0X

- 1.W/ Dust cover W/UL LOGO
- 2.W/O Dust cover W/UL LOGO
- 3.W/ Dust cover W/O UL LOGO
- 4.W/O Dust cover W/O UL LOGO

MARK	006000	NEW DESIGN	LONNY	092922'
ECN-NO.		REVISION RECORD	DRAWN	DATE
	UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED	
	Dimension Range Tolerance	1/1	APPROVED	
	X.X	±0.20	mm	
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET 1/1
ANGLE	±5°			
Material/Plated/Notes	NAME			
SEE NOTE	180° CAT5e KEYSTONE JACK			
Tooling No.	PART NO.	N4425-099-0X		REV. A
	DOC. NO.	NN442A099		