



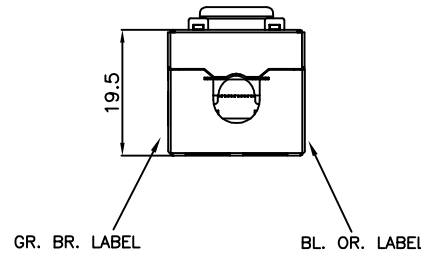
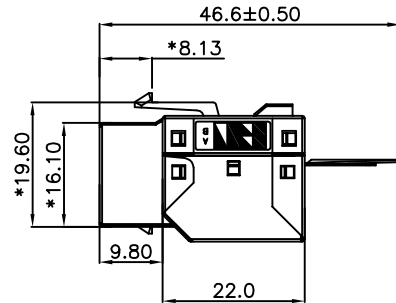



RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

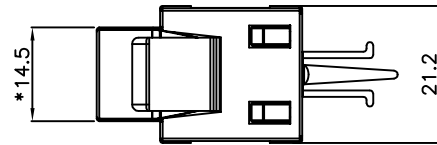

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz, 1MIN.
- 6. PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2

MECHANICAL:

- 1. HOUSING MATERIAL : PC UL94V-0
- 2. INSERT MATERIAL : FLAME RETARDANCY ABS UL94V-0
- 3. PCB MATERIAL : FR-4 THICKNESS 1.6mm
- 4. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN t=0.35mm
- 5. IDC CONTACT MATERIAL : PHOSPHOR BRONZE t=0.50mm WITH TIN PLATING
- 6. WIRE : AWG 24~26

ENVIRONMENTAL:

- 1. STORAGE : -40 C TO +85 C.
- 2. OPERATION : -40 C TO +85 C.

CONFORM TO TIA/EIA 568B
MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
PART NUMBER: N4421-116-01

	DELETE LOGO(1)	SAIL	061107
	MODIFY TOLERANCE(1)	SAIL	051407
	NEW DESIGN	SAIL	120406
MARK	ECN-NO.	REVISION RECORD	DRAWN DATE
	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE
	Dimension Range	Tolerance	1/1
	X.X	±0.20	UNIT
	X.XX	±0.15	mm
X.XXX	±0.10	SIZE	A3
ANGLE	±1°		
Contact Technology Co., Ltd.		CHECKED	eva
Material/Plated/Notes		APPROVED	jacky
SEE NOTE		SHEET	1/1
CAT.5e KEYSTONE, 3u" FTP		REV.	C
Tooling No.	PART NO. N4421-116-01		
	DOC. NO. N442A116		