

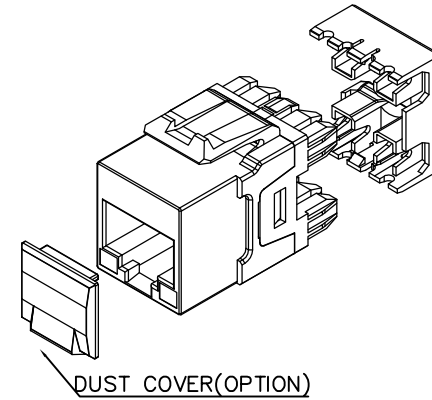


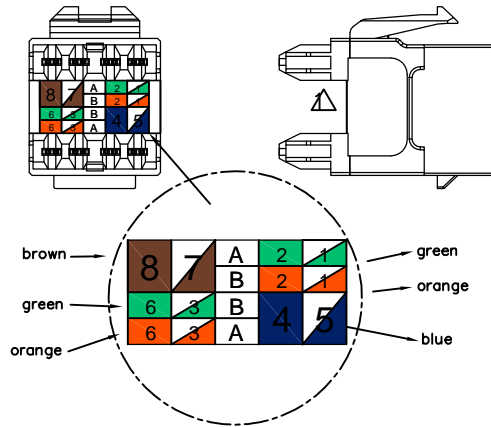


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.



DUST COVER(OPTION)



NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1 MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : PC UL94V-0
- 2. INSERT MATERIAL : PC UL94V-0
- 3. COVER MATERIAL : PC UL94V-0
- 4. FCC COVER MATERIAL : PC UL94V-0
- 5. PCB MATERIAL : FR-4 THICKNESS 1.2 mm
- 6. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN t=0.35 mm
Min.50 micro-inch Gold plating over 30-80 micro-inch Nickel plated
- 7. IDC CONTACT MATERIAL : PHOSPHOR BRONZE t=0.50 mm WITH NICKEL PLATING
- 8. WIRE : #23~26 AWG
- 9. Durability: :
9-1. JACK :750 cycles Plug-Jack mating and unmating test,insertion cycles at 20 cycles/minute Max.
9-2. IDC : Max.200 punching times.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION : -40°C TO +85°C.

CONFORMING TO TIA/EIA 568B
MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.
PART NUMBER: N4455-099-0X

- 1.W/ Dust cover(FCC HS'G WHITE,IDC HS'G YELLOW)
- 2.W/O Dust cover(FCC HS'G WHITE,IDC HS'G YELLOW)
- 3.W/ Dust cover(ALL WHITE)

△ X1	N2005E01	MODIEY DRAWING	HENRY	050720'
△	0000000	NEW DESIGN	HENRY	051619'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED	
Dimension Range Tolerance		1/1	APPROVED	
X.X	±0.20	UNIT	mm	
X.XX	±0.15	SIZE	A3	
X.XXX	±0.10	ANGLE	±5°	
Contact Technology Co., Ltd.		NAME		
SEE NOTE		180° CAT6A KEYSTONE JACK		
Tooling No.		PART NO.	N4455-099-0X	REV. 1
		DOC. NO.	NN445A099	