
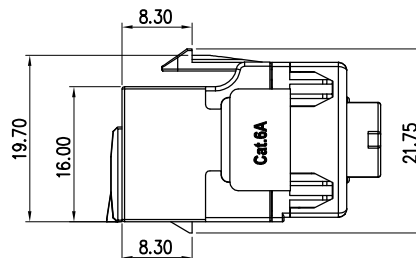





RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

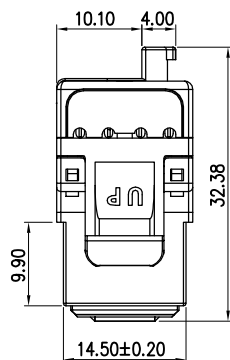

WITHOUT DUST COVER

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz, 1MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION : -40°C TO +85°C.

CONFORM TO TIA/EIA 568

MECHANICAL:

- 1. HOUSING MATERIAL: PC UL94V-0
- 2. INSERT MATERIAL: PC UL94V-0
- 3. PCB MATERIAL: FR-4
- 4. CONTACT MATERIAL: PHOSPHOR BRONZE
- 5. IDC CONTACT MATERIAL: PHOSPHOR BRONZE WITH SILVER OR NICKEL PLATING
- 6. WIRE : #22~24AWG
- 7. PART NUMBER: N4455-023-0X
 - 1-PC WHITE/C6A LOGO(FCC HS'G painted in Al WITH 80u"Min)
 - 2-PC WHITE/C6A LOGO-WITHOUT DUST COVER(FCC HS'G painted in Al WITH 80u"Min)
 - 3-PC WHITE/C6A LOGO
 - 4-PC WHITE/C6A LOGO-WITHOUT DUST COVER

△ XO	000000	NEW DESIGN	SELINA	081519*
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
CTK	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1/1	APPROVED
	X.X	±0.20	UNIT	mm
	X.XX	±0.15	SIZE	A3
Contact Technology Co., Ltd.		ANGLE	±5°	SHEET 1/1
Material/Plated/Notes		NAME		
SEE NOTE		C6A 180° UTP KEYSTONE		
Tooling No.		PART NO.	N4455-023-0X	
		DOC. NO.	NN445A023	
		REV.	A	