

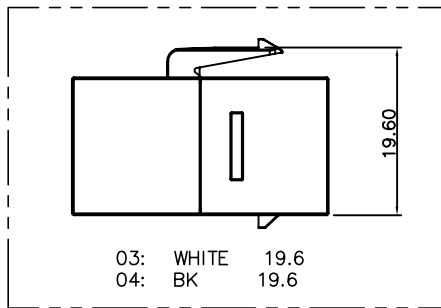






RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.



NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz,1MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MECHANICAL:

1. HOUSING MATERIAL: PLASTIC UL94V-0
2. INSERT MATERIAL: PLASTIC UL94V-0
3. PCB MATERIAL: FR-4
4. PART NUMBER: N446X-031-0X

1-3u"	2-6u"	01: C6A	WHITE	19.8
		02: C6A	BK	19.8
3-15u"	4-30u"	03: C6A	WHITE	19.6
		04: C6A	BK	19.6
5-50u"				

ΔX0	000000	NEW DESIGN		Patrick	091322'
MARK	ECN-NO.	REVISION RECORD		DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
		Dimension Range Tolerance		1:1	
		X.X	±0.20	UNIT	APPROVED
		X.XX	±0.15	mm	
Contact Technology Co., Ltd.		X.XXX	±0.10	SIZE	A3
Material/Plated/Notes		ANGLE	±5°	SHEET	1/1
SEE NOTE		NAME CAT.6A COUPLER W/ LATCH			
Tooling No.		PART NO. SEE NOTE		REV. 0	
		DOC. NO. NN446A031			