


RoHS


THIS IS A RoHS COMPLIANT COMPONENT/ PRODUCT.

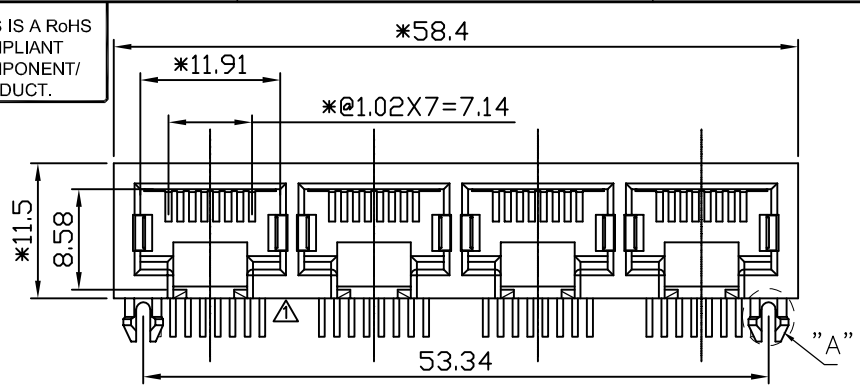


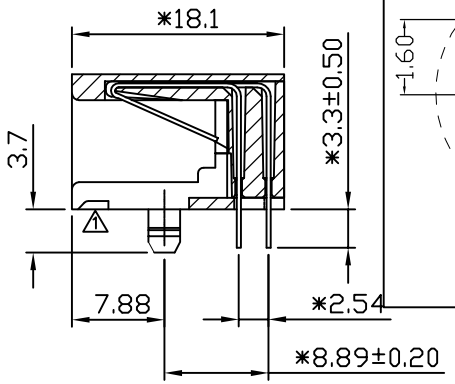

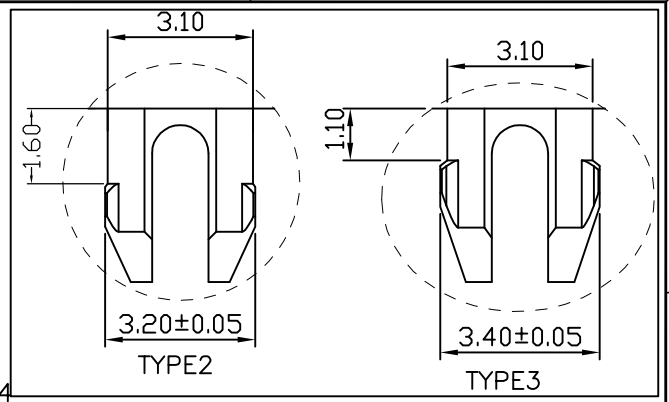

DETAIL "A"
SCAIL: 4:1

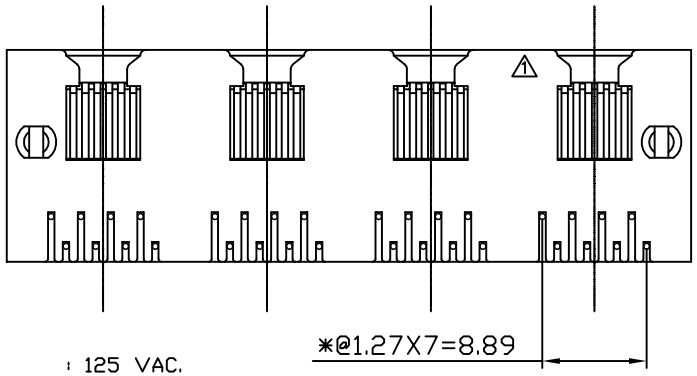

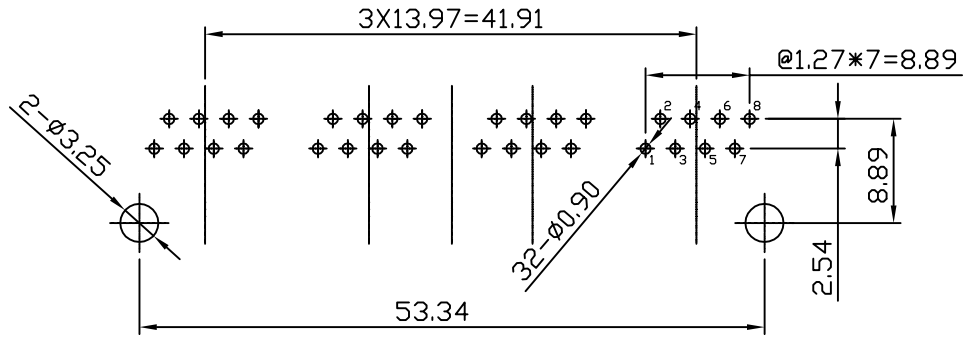

PC BOARD LAYOUT
COMPONENT SIDE SHOWN

ELECTRICAL:
1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:
1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER : 10 LBS MIN.


ENVIRONMENTAL:
1. STORAGE : -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER : N334X-064-XX

1-3u" 2-6u"
3-15u" 4-30u"
5-50u" 7-1u"
B-小於1U"

01-8P8C PBT YL 114C TYPE2
2 02-8P8C PBT BK TYPE1
3 03-8P4C (1, 2, 3, 6) PBT BK TYPE1
4 04-8P4C (1, 2, 3, 6) PBT YL 114C TYPE1
4 05-8P8C FR52 BK TYPE2
5 06-8P4C (1, 2, 3, 6) HIGH TEMP YL 114C FOR 1.0MM PCB 板厚 TYPE3
6 07-8P8C PBT YL TYPE1



TYPE1

DETAIL "A"
SCAIL: 4:1

MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
6 X1		ADD NEW P/N(1)	Grace	042018'
5 X1		ADD NEW P/N(1)	JOY	020917'
4 X1		ADD NEW P/N(1)	JOY	052915'
3 X1		ADD NEW P/N(1)	Grace	041114'
2 X1		ADD NEW P/N(1)	QUAN	083011'
1 X3		ADD NEW P/N(1)	QUAN	060111'
0 X0	0000000	NEW DESIGN	QUAN	051111'

Contact Technology Co., Ltd.

UNLESS OTHERWISE SPECIFIED TOLERANCE

Dimension Range	Tolerance
X.X	±0.20
X.XX	±0.15
X.XXX	±0.10
ANGLE	±1°

SCALE 3/1 | UNIT mm | SIZE A3 | SHEET 1/1

CHECKED | APPROVED

Material/Plated/Notes: SEE NOTE

NAME: 1*4 8P8C 11.5 SIDE ENTRY JACK

Tooling No.

PART NO. SEE NOTE

DOC. NO. NN330A064

REV. 6

Design drawing